

No. 6406-125

Aluminium screw jack with swarf protection

Scraper ring protects screw jack spindle against chips. Centring hole dia. 12 mm. Spindle tempering steel, blued. Trapezoidal thread, self-locking with end stopbody.

Composed of:


- screw jack
- intermediate ring 12.5 mm
- intermediate ring 25 mm and
- Alu- and magnetic base.

Order no.	Size	H min.	H max.	TR	D1	D2	D3	F max. [kN]	Weight [g]
72371	125	75	125	30x4	50	50	55	30*	920

* ensured to max. 350 mm total height, danger of buckling for larger figures!

Note:

Suitable pads are no. 6440, 6441 and 6445.
Do not adjust screw jack under load!

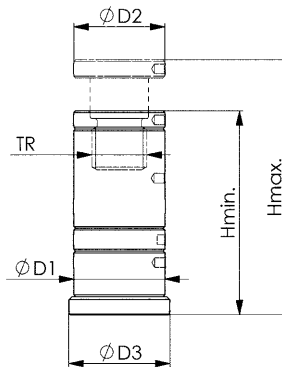

Recommendations




No. 6440,
page 56



No. 6441,
page 56



No. 6445,
page 57

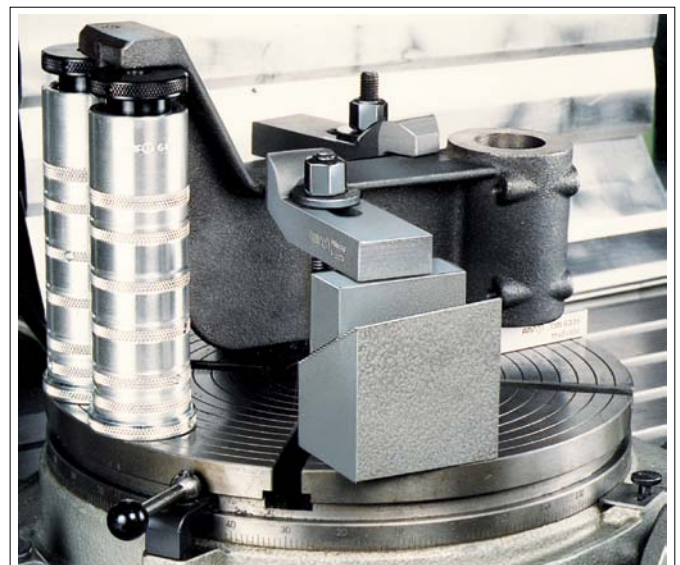

Subject to technical alterations.

