


TURNING

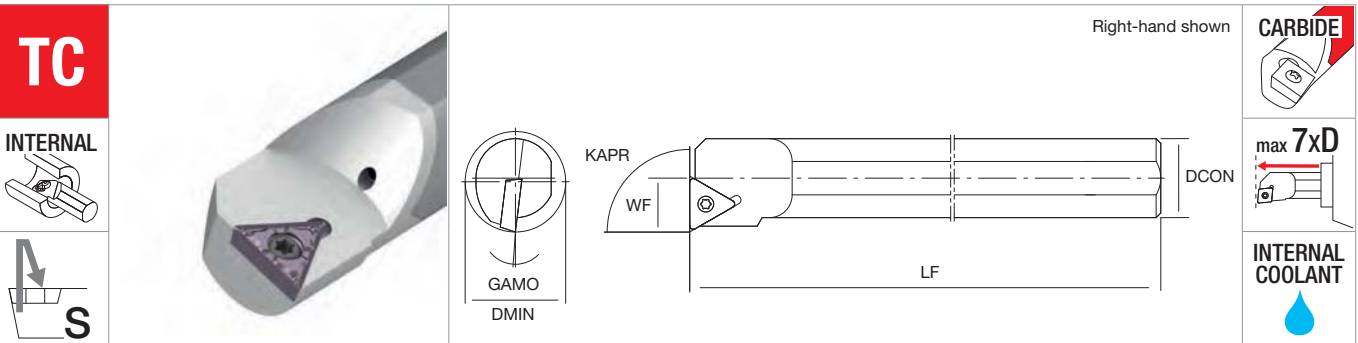

THREADING

<b>E STFC</b> Internal turning (KAPR 91°)		R	L	DMIN	DCON	WF	LF	GAMO	KG	MIID

<b>11</b>	NT-E10K-STFC%/L11	●	●	12	10	6	125	15°	TC□□1102
	NT-E12M-STFC%/L11	●	●	14	12	7	150	10°	
	NT-E16R-STFC%/L11	●	●	18	16	9	200	8°	
	NT-E20R-STFC%/L11	●	●	22	20	11	200	6°	

● stock standard

GROOVING



NT-E10K-STFC%/L11	NT-ST010	NT-FT07
NT-E12M-STFC%/L11		
NT-E16R-STFC%/L11		
NT-E20R-STFC%/L11		

MILLING



TC□□1102	page 24	page 47	-	page 76
----------	---------	---------	---	---------

DRILLING

ACCESSORIES