


TURNING

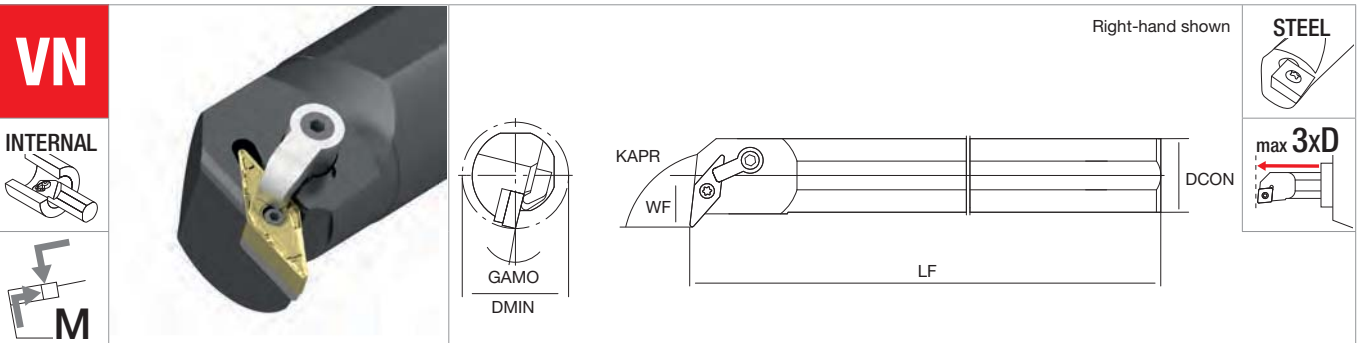

THREADING

S MVUN Internal turning (KAPR 93°)		R	L	DMIN	DCON	WF	LF	GAMO	KG	MIID

16	NT-S25R-MVUN®/L16	● ●	37	25	20	200	12°		VN□1604
	NT-S32S-MVUN®/L16	● ●	40	32	22	250	12°		
	NT-S40T-MVUN®/L16	● ●	50	40	27	300	15°		
	NT-S50U-MVUN®/L16	○ ○	63	50	32	350	12°		

● stock standard, ○ non-standard stock

GROOVING



NT-S25R-MVUN®/L16	NT-SH075	NT-SP020	NT-WR020	NT-CS010	NT-SC008	NT-WR030
NT-S32S-MVUN®/L16					NT-SC010	
NT-S40T-MVUN®/L16						
NT-S50U-MVUN®/L16						

MILLING



VN□1604	page 31	page 52	page 67	-
---------	---------	---------	---------	---

DRILLING

ACCESSORIES