PLUS 18190

SPARE PARTS | Complementos | Repuestos

Cutter ØDc	Insert Screw	Key (Torx)	Key (Torx - Nm) (Order separately)	Torque Value	Screw (Order separately)	DIN 6368 Wrench
W18190 – 32 - 40	P0401200	XT15	DT1530	3,0	-	-
R18190 – 32 - 40	P0401200	XT15	DT1530	3,0	-	-
A18190 – 50 - 63	P0401200	XT15	DT1530	3,0	-	-
A18190 – 80	P0401200	XT15	DT1530	3,0	J0123510	SD6368-12
A18190 – 100	P0401200	XT15	DT1530	3,0	J0164110	SD6368-16
A18190 – 125	P0401200	PT15	DT1530	3,0	J0204610	SD6368-20
A18190 – 160	P0401200	PT15	DT1530	3,0	-	-

Note: The toolholder is supplied with the XT/PT key. To order the DT key please check the page A-243.
Check the procedures for the clamping screws on the page A-243.

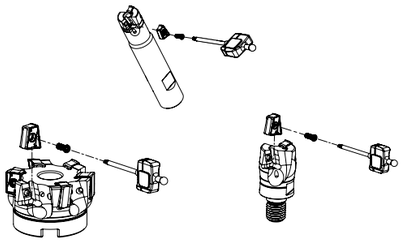

RECOMMENDED CUTTING CONDITIONS | Condições de corte recomendadas | Condiciones de corte recomendas

ISO	PSM	Material	HB (Brinell)	Vc (m/min) ← Wear Resistance				Toughness →	Feed f_z (mm/t)		
				PH0910	PH7910	PH7920	PH7930	PHS740	ANHX 16... LP	ANHX 16... MP	ANHX 16... LN
P	1	Unalloyed Steel	125-220	-	190-280	180-250	160-220	140-200	0,10-0,22	0,08-0,25	-
	2	Low-Alloyed Steel	220-280	-	180-240	170-210	150-180	130-160	0,10-0,22	0,08-0,25	-
	3	High-Alloyed Steel	280-380	-	170-220	160-200	130-160	110-140	0,10-0,20	0,08-0,22	-
K	7	Malleable Cast Iron	130-230	-	180-320	170-300	160-280	-	0,10-0,25	0,08-0,25	-
	8	Grey Cast Iron	180-245	-	170-280	150-250	140-240	-	0,10-0,25	0,08-0,25	-
	9	Nodular Cast iron	160-250	-	100-240	90-210	90-200	-	0,10-0,20	0,08-0,22	-
N	10	Aluminium and Non Ferrous	30-130	300-1200	-	-	-	-	-	-	0,10-0,40

(Note 1)
Cutting conditions a_e/Dc=70%.

(Note 2)

Operation	a_e	Vc & fz	a_p (mm)
Slotting	100%	<20%	2,0-4,5
Shouldering	<50%	>8%	6,0-8,0
	≤25%	>12%	8,0-15,0

(Note 3)
It's possible to occur vibrations in certain cases. Please reduce depth of cut and / or reduce cutting conditions in following cases:
- When using long shank;
- When using long tool overhang with arbor type;
- When application has poor clamping rigidity or when using a low rigidity machine.

GRADES SELECTION GUIDE | Guia para selecção de graus | Guía para selección de calidades

ISO	PSM	Material	HB (Brinell)	Grades ← Wear Resistance				Toughness →
				PH0910	PH7910	PH7920	PH7930	PHS740
P	1	Unalloyed Steel	125-220		✓	✓	✓	✓
	2	Low-Alloyed Steel	220-280		✓	✓	✓	✓
	3	High-Alloyed Steel	280-380		✓	✓	✓	✓
K	7	Malleable Cast Iron	130-230		✓	✓	✓	
	8	Grey Cast Iron	180-245		✓	✓	✓	
	9	Nodular Cast iron	160-250		✓	✓	✓	
N	10	Aluminium and Non Ferrous	30-130	✓				

Good Conditions
Average Conditions
Difficult Conditions

CHIP-BREAKER SELECTION GUIDE | Guia para aplicações do quebra-aparas | Guía para aplicación del rompevirutas

ISO	PSM	Material	HB (Brinell)	Chip Breaker Application	
				1st choice	Difficult Operations
P	1	Unalloyed Steel	125-220	ANHX 16... LP	ANHX 16... MP
	2	Low-Alloyed Steel	220-280	ANHX 16... LP	ANHX 16... MP
	3	High-Alloyed Steel	280-380	ANHX 16... LP	ANHX 16... MP
K	7	Malleable Cast Iron	130-230	ANHX 16... LP	ANHX 16... MP
	8	Grey Cast Iron	180-245	ANHX 16... LP	ANHX 16... MP
	9	Nodular Cast iron	160-250	ANHX 16... LP	ANHX 16... MP
N	10	Aluminium and Non Ferrous	30-130	ANHX 16... LN	-

PLUNGING | Mergulho | Plunge

L≤3Dc	L>3Dc	S max.
fz (mm/t)		
0,10-0,20	0,10-0,14	$S_{max} = \sqrt{DC.DR - DR^2}$



S max and DR corresponding cutting diameter Dc (mm)								
DR (mm)	Dc (mm)							
	32	40	50	63	80	100	125	160
1,0	5,6	6,2	7,0	7,9	8,9	9,9	11,1	12,6
2,0	7,7	8,7	9,8	11,0	12,5	14,0	15,7	17,8
3,0	9,3	10,5	11,9	13,4	15,2	17,1	19,1	21,7
4,0	10,6	12,0	13,6	15,4	17,4	19,6	22,0	25,0
5,0	11,6	13,2	15,0	17,0	19,4	21,8	24,5	27,8