
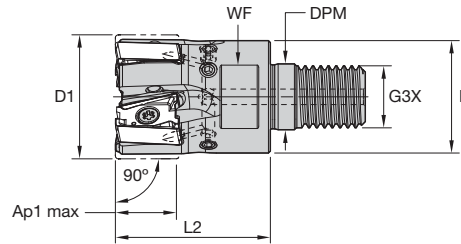


- Superior wall and surface finish capabilities.
- “Stepless” solution. True 90° to run precise applications in multiple axial passes.
- Strong concept to run up to 15mm (.590") depth of cut.
- Effective internal coolant feature, reaching the cutting edge precisely.



Shoulder Mills

■ Screw-On End Mills

order number	catalogue number	D1	D	DPM	G3X	L2	WF	Ap1 max	Z	kg	max RPM
5873211	VSM490D025Z02M12XN15	25	21	13	M12	32	17	15,0	2	0,18	26700
5873212	VSM490D032Z03M16XN15	32	29	17	M16	40	24	15,0	3	0,18	22000
5873213	VSM490D032Z04M16XN15	32	29	17	M16	40	24	15,0	4	0,18	22000
5873214	VSM490D035Z04M16XN15	35	29	17	M16	40	24	15,0	4	0,19	20600

■ Spare Parts



insert screw

MS-2071



Nm

3,5



Torx Plus driver

DT15IP

MS-2071	3,5	DT15IP
---------	-----	--------