
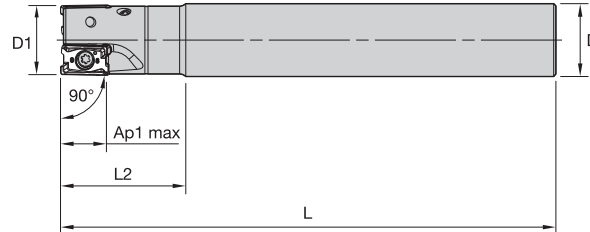


- Superior wall and surface finish capabilities.
- “Stepless” solution. True 90° to run precise applications in multiple axial passes.
- Strong concept to run up to 15mm (.590") depth of cut.
- Effective internal coolant feature, reaching the cutting edge precisely.



Shoulder Mills

■ Cylindrical End Mills

order number	catalogue number	D1	D	L	L2	Ap1 max	Z	kg	max RPM
5873216	VSM490D025Z02A25XN15L100	25	25	100	43	15,0	2	0,32	26700
5710287	VSM490D025Z02A25XN15L170	25	25	170	43	15,0	2	0,59	26700
5873217	VSM490D032Z03A32XN15L110	32	32	110	49	15,0	3	0,59	22000
5710288	VSM490D032Z03A32XN15L200	32	32	200	50	15,0	3	1,14	22000
5873218	VSM490D032Z04A32XN15L110	32	32	110	49	15,0	4	0,58	22000
5873219	VSM490D032Z04A32XN15L200	32	32	200	50	15,0	4	1,14	22000

■ Spare Parts



insert screw

MS-2071



Nm

3,5



Torx Plus driver

DT15IP