

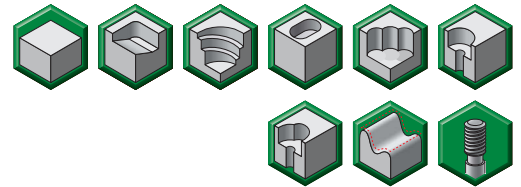
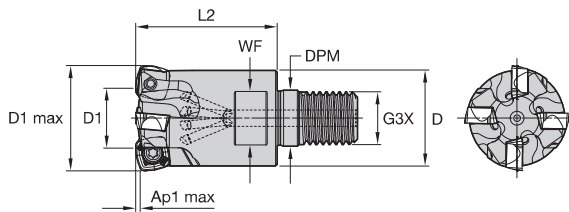


Screw-On End Mills • Metric

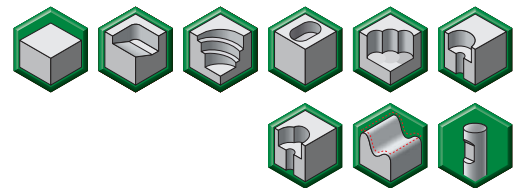



order number	catalogue number	D1 max	D1	D	DPM	G3X	L2	WF	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6597731	VXF025Z03M12XD09	25	11	21	12,5	M12	35	9	1,5	3	2.8°	48500	Yes	0,09
6597732	VXF032Z03M16XD09	32	18	29	17,0	M16	43	10	1,5	3	1.5°	40500	Yes	0,20
6597733	VXF032Z04M16XD09	32	18	29	17,0	M16	43	10	1,5	4	1.5°	40500	Yes	0,20
6597734	VXF035Z04M16XD09	35	21	29	17,0	M16	43	10	1,5	4	1.3°	37500	Yes	0,21
6597735	VXF042Z05M16XD09	42	28	29	17,0	M16	43	10	1,5	5	1.0°	34000	Yes	0,25

Weldon® End Mills • Metric

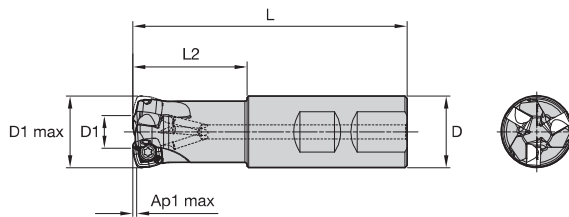

order number	catalogue number	D1 max	D1	D	L	L2	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6597736	VXF025Z03B25XD09	25	11	25	96	40	1,5	3	2.8°	48500	Yes	0,28
6597737	VXF032Z04B25XD09	32	18	25	96	40	1,5	4	1.5°	40500	Yes	0,36

Cylindrical End Mills • Metric

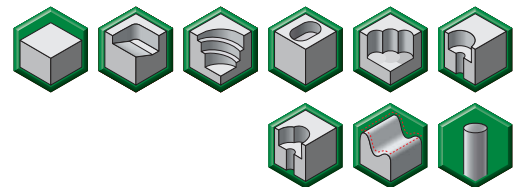
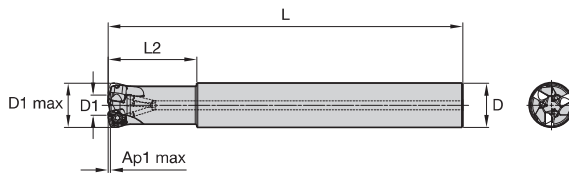


order number	catalogue number	D1 max	D1	D	L	L2	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6597740	VXF025Z02A25XD09L200	25	11	25	200	50	1,5	2	2.8°	48500	Yes	0,67
6597738	VXF025Z03A25XD09	25	11	25	100	32	1,5	3	2.8°	48500	Yes	0,32
6597742	VXF025Z03A25XD09L200	25	11	25	200	50	1,5	3	2.8°	48500	Yes	0,67
6597743	VXF032Z03A25XD09L200	32	18	32	200	40	1,5	3	1.5°	40500	Yes	0,75
6597739	VXF032Z04A25XD09	32	18	32	110	40	1,5	4	1.5°	40500	Yes	0,42
6597744	VXF032Z04A25XD09L200	32	18	32	200	40	1,5	4	1.5°	40500	Yes	0,75

FOR SPARE PARTS, PLEASE VISIT WIDIA NOVO™ OR WIDIA.COM.

MOUNTING SCREWS ARE NOT INCLUDED IN STANDARD PACKAGING.

Shell Mills • Metric

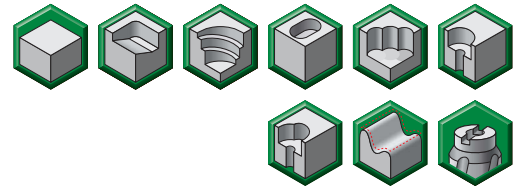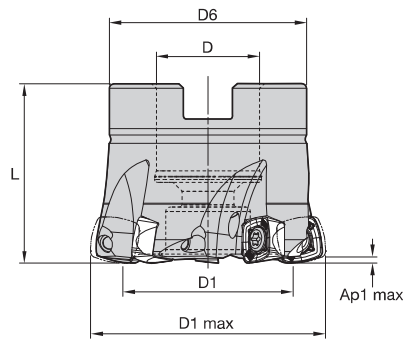


order number	catalogue number	D1 max	D1	D	D6	L	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6597746	VXF040Z04S16XD09	40	26	16	37	32	1,5	4	.8°	34500	Yes	0,15
6597747	VXF040Z05S16XD09	40	26	16	37	32	1,5	5	.8°	34500	Yes	0,14
6597748	VXF042Z05S16XD09	42	28	16	37	32	1,5	5	.8°	34000	Yes	0,16
6597750	VXF050Z07S22XD09	50	34	22	42	40	1,5	7	.7°	30000	Yes	0,28
6597749	VXF050Z05S22XD09	50	36	22	42	40	1,5	5	.7°	30000	Yes	0,29
6597751	VXF052Z06S22XD09	52	38	22	42	40	1,5	6	.7°	29500	Yes	0,30
6597755	VXF063Z06S22XD09	63	49	22	42	40	1,5	6	.5°	26000	Yes	0,40

FOR SPARE PARTS, PLEASE VISIT WIDIA NOVO™ OR WIDIA.COM.

MOUNTING SCREWS ARE NOT INCLUDED IN STANDARD PACKAGING.

Inserts • XDPT-MM




- first choice
- alternate choice

P	●	●	○
M	●	●	●
K	○	○	○
N	○	○	○
S	●	○	●
H	○	○	○

ISO catalogue number	cutting edges	LI		S		D	Rε	WP25PM	WP40PM	WS40PM
		LI	S	LI	S					
XDPT090412ERMM	4	10,00	4,76	10,00	1,20		6596471	I	6596472	

Inserts • XDPT-MH



- first choice
- alternate choice

P	●	●	○
M	●	●	●
K	○	○	○
N	○	○	○
S	●	○	●
H	○	○	○

ISO catalogue number	cutting edges	LI		S		D	Rε	WP25PM	WP40PM	WS40PM
		LI	S	LI	S					
XDPT090412SRMH	4	10,00	4,76	10,00	1,20		6596822	I		I

For M4000 cartridge milling system, please see page 12.



VSM890™-12
M4000CA-XN10
(MM6433216)



P M K S

Insert Selection Guide

Material Group	Light Machining		General Purpose		Heavy Machining	
	Geometry	Grade	Geometry	Grade	Geometry	Grade
P1-P2	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
P3-P4	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
P5-P6	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
M1-M2	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
M3	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S1-S2	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S3	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S4	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM

Recommended Starting Speeds [m/min]*

Material Group		WP25PM			WP40PM			WS40PM		
P	1	395	340	325	355	310	295	-	-	-
	2	330	290	240	300	260	215	-	-	-
	3	305	260	210	275	235	190	-	-	-
	4	270	220	180	245	205	160	-	-	-
	5	220	205	180	205	185	160	205	175	145
	6	200	150	120	180	140	110	180	130	95
M	1	245	215	200	235	205	185	250	205	170
	2	220	190	155	210	180	150	215	175	145
	3	170	145	115	155	140	110	175	130	100
S	1	50	40	30	50	40	35	50	40	30
	2	50	40	30	50	40	35	50	40	30
	3	60	50	30	60	50	35	60	50	30
	4	85	60	40	80	60	40	70	60	35

NOTE: FIRST choice starting speeds are in **bold** type. As the average chip thickness increases, the speed should be decreased.
 *Material groups P, M, K, and H show recommended starting speeds for dry machining. For wet machining, reduce speed by 20%.
 *Material groups N and S show recommended starting speeds for wet machining. Not recommended for dry machining.

Recommended Starting Feeds [mm]

Light Machining	General Purpose	Heavy Machining
-----------------	-----------------	-----------------

At 0,90 Axial Depth of Cut (AP1)

Insert Geometry	Recommended Starting Feed per Tooth (Fz) in Relation to % of Radial Engagement (ae)															Insert Geometry
	5%		10%		20%		30%		40-100%							
.E..MM	0,48	1,42	2,20	0,35	1,00	1,52	0,26	0,74	1,11	0,23	0,64	0,96	0,21	0,59	0,88	.E..MM
.S..MH	0,70	1,58	2,65	0,50	1,11	1,80	0,37	0,82	1,31	0,33	0,71	1,14	0,30	0,65	1,04	.S..MH

At 1,10 Axial Depth of Cut (AP1)



Insert Geometry	Recommended Starting Feed per Tooth (Fz) in Relation to % of Radial Engagement (ae)															Insert Geometry
	5%		10%		20%		30%		40-100%							
.E..MM	0,44	1,28	1,98	0,32	0,90	1,37	0,24	0,67	1,01	0,21	0,58	0,87	0,19	0,53	0,80	.E..MM
.S..MH	0,64	1,42	2,37	0,45	1,00	1,63	0,34	0,74	1,19	0,30	0,64	1,03	0,27	0,59	0,94	.S..MH

At 1,50 Axial Depth of Cut (AP1)

Insert Geometry	Recommended Starting Feed per Tooth (Fz) in Relation to % of Radial Engagement (ae)															Insert Geometry
	5%		10%		20%		30%		40-100%							
.E..MM	0,64	1,42	2,37	0,45	1,00	1,63	0,34	0,74	1,19	0,30	0,64	1,03	0,27	0,59	0,94	.E..MM
.S..MH	0,55	1,22	2,01	0,39	0,86	1,39	0,29	0,64	1,02	0,25	0,55	0,89	0,23	0,51	0,81	.S..MH



NOTE: Use "Light Machining" values as starting feed rate.

Screw-On End Mills • Metric

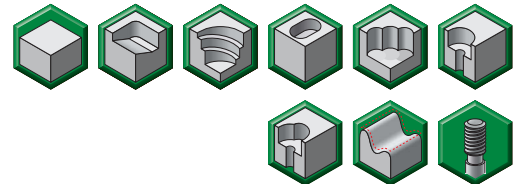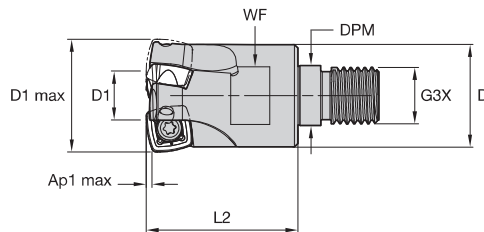

order number	catalogue number	D1 max	D1	D	DPM	G3X	L2	WF	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6596723	VXF032Z03M16XD12	32	14	29	17,0	M16	43	24	2,5	3	1.8°	31500	Yes	0,19

Shell Mills • Metric

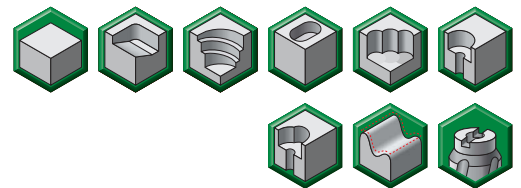


order number	catalogue number	D1 max	D1	D	D6	L	Ap1 max	Z	max ramp angle	max RPM	coolant supply	kg
6596725	VXF040Z04S22XD12	40	22	22	38	40	2,5	4	1.4°	26500	Yes	0,19
6596727	VXF042Z04S22XD12	42	24	22	38	40	2,5	4	1.3°	25500	Yes	0,21
6596728	VXF050Z04S22XD12	50	32	22	48	40	2,5	4	.9°	22500	Yes	0,31
6596729	VXF052Z05S22XD12	52	34	22	48	40	2,5	5	.8°	22000	Yes	0,32
6596730	VXF063Z05S22XD12	63	45	22	53	40	2,5	5	.6°	19500	Yes	0,47
6596732	VXF066Z06S27XD12	66	48	27	53	45	2,5	6	.5°	19000	Yes	0,55
6596733	VXF080Z06S27XD12	80	62	27	55	50	2,5	6	.5°	17000	Yes	0,87
6596734	VXF100Z07S32XD12	100	82	32	65	50	2,5	7	.3°	15000	Yes	1,34

FOR SPARE PARTS, PLEASE VISIT WIDIA NOVO™ OR WIDIA.COM.

MOUNTING SCREWS ARE NOT INCLUDED IN STANDARD PACKAGING.



Inserts • XDPT-MM • Best Fit for Pocketing and Profiling Operations




- first choice
- alternate choice

P	●	●	○	○
M	●	●	●	●
K	○	○	○	○
N	○	○	○	○
S	●	○	●	○
H	○	○	○	○

ISO catalogue number	cutting edges	LI	S	D	Re	WP25PM	WP40PM	WS40PM
XDPT120512ERMM	4	12,70	5,56	12,70	1,20	6596438	I	6596439

Inserts • XDPT-MH • Dedicated Geometry for Heavy Roughing



- first choice
- alternate choice

P	●	●	○	○
M	●	●	●	●
K	○	○	○	○
N	○	○	○	○
S	●	○	●	○
H	○	○	○	○

ISO catalogue number	cutting edges	LI	S	D	Re	WP25PM	WP40PM	WS40PM
XDPT120515SRMH	4	12,70	5,56	12,70	1,50	I	6596440	I

For M4000 cartridge milling system, please see page 12.



VSM890™-12
M4000CA-XN10
(MM6433216)



P M K S

Insert Selection Guide

Material Group	Light Machining		General Purpose		Heavy Machining	
	Geometry	Grade	Geometry	Grade	Geometry	Grade
P1-P2	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
P3-P4	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
P5-P6	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
M1-M2	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
M3	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S1-S2	XDPT-MM	WP25PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S3	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM
S4	XDPT-MM	WS40PM	XDPT-MM	WS40PM	XDPT-MH	WP40PM