


LARGE RANGE DIAL TEST INDICATOR

**INSPECTION
CERTIFICATE**
TRACEABLE TO NIST


JEWELLED
BEARING

- Dial reading: 0-40-0
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps:
diameter $\varnothing 4\text{mm}$ and $\varnothing 8\text{mm}$
- Optional accessory: styli (page 134)

clamp (included)



2386-16A

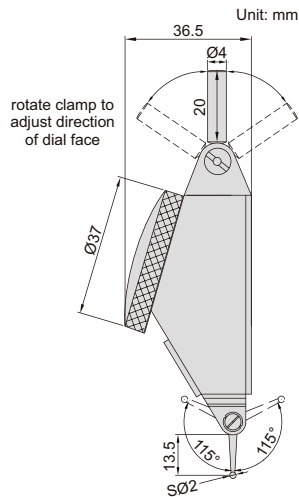

Code	Range	Graduation	Accuracy	Hysteresis
2386-16A*	1.6mm	0.01mm	25 μm	8 μm

* Supplied with manufacturer inspection certificate traceable to NIST USA