

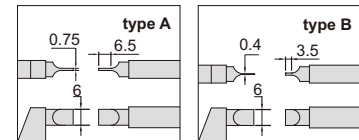


DIGITAL BLADE MICROMETERS

- Measure the groove diameter of shafts and keyways
- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-, 7302-, 7305-)

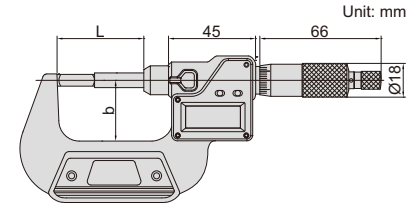

3532-25A



(mm)

| Code | Range | Type | Accuracy | L | b |
|------------|----------------|------|----------|-------|------|
| 3532-25A | 0-25mm/0-1" | A | ±4μm | 57 | 32 |
| 3532-50A | 25-50mm/1-2" | A | ±4μm | 82 | 44.5 |
| 3532-75A | 50-75mm/2-3" | A | ±5μm | 107 | 57 |
| 3532-100A | 75-100mm/3-4" | A | ±5μm | 132.6 | 69.5 |
| 3532-125A | 100-125mm/4-5" | A | ±6μm | 158 | 82 |
| 3532-150A | 125-150mm/5-6" | A | ±6μm | 183.4 | 94.5 |
| 3532-175A | 150-175mm/6-7" | A | ±7μm | 208.8 | 107 |
| 3532-25BA | 0-25mm/0-1" | B | ±4μm | 57 | 32 |
| 3532-50BA | 25-50mm/1-2" | B | ±4μm | 82 | 44.5 |
| 3532-75BA | 50-75mm/2-3" | B | ±5μm | 107 | 57 |
| 3532-100BA | 75-100mm/3-4" | B | ±5μm | 132.6 | 69.5 |
| 3532-125BA | 100-125mm/4-5" | B | ±6μm | 158 | 82 |
| 3532-150BA | 125-150mm/5-6" | B | ±6μm | 183.4 | 94.5 |
| 3532-175BA | 150-175mm/6-7" | B | ±7μm | 208.8 | 107 |