

DATA
OUTPUT

NON-ROTATING
SPINDLE


DIGITAL UNIVERSAL MICROMETERS

- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip (same as series **3280**)
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: 55° anvil/spindle tip code **3280-SP1** and **3280-SP2** (same as series **3280**), data output cable (code **7315-**, **7302-**, **7305-**)



3580-25A

Code	Range	Accuracy	L	b
3580-25A	0-25mm/0-1"	±4μm	42mm	26mm
3580-50A	25-50mm/1-2"	±4μm	67mm	38mm
3580-75A	50-75mm/2-3"	±5μm	92mm	50mm
3580-100A	75-100mm/3-4"	±5μm	118mm	62mm
3580-125A	100-125mm/4-5"	±6μm	143mm	70mm
3580-150A	125-150mm/5-6"	±6μm	168mm	82mm
3580-175A	150-175mm/6-7"	±7μm	192mm	95mm
3580-200A	175-200mm/7-8"	±7μm	217mm	107mm

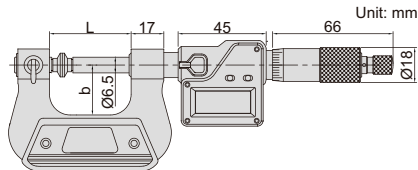

supplied with 7 pairs
of anvil/spindle tip
(same as series **3280**)

