
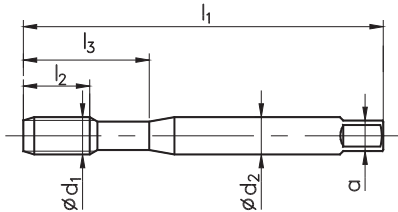
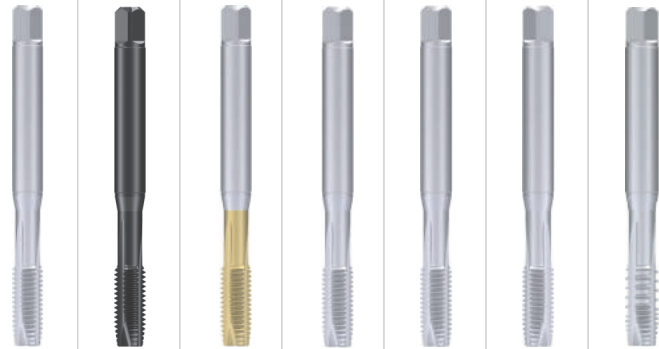


Gwint metryczny zwykły ISO DIN-13

 ISO Metric coarse thread DIN-13
 Metrisches ISO-Regelgewinde DIN-13


HSSE


DIN-371


										800	800	800	800	800	800	800	
Zastosowanie / Application / Einsatzgebiete																	
Materiał obrabiany / Material / Werkstoff										P1.3	P1.3, M2.2	P1.1-P1.4, M2.1 M2.2, N4.5, N4.7 N4.8	P1.3	P1.3	P1.3	P1.1-P1.3 N4.1, N4.4	
Rodzaj materiału / Quality of material / Qualität										HSSE	HSSE	HSSE	HSSE	HSSE	HSSE	HSSE	
Typ otworu / Hole type / Lochform																	
Wykonanie / Execution / Ausführung										B	B	B	B	B	B LH	B Az	
Rodzaj powłoki / Coating / Beschichtung											OX	TIN					
Nakrój / Chamfer / Anschnitt										B / 4-5P	B / 4-5P	B / 4-5P	B / 4-5P	B / 4-5P	B / 4-5P	B / 4-5P	
Tolerancja / Tolerance / Toleranz										ISO2 (6H)	ISO2 (6H)	ISO2 (6H)	ISO3 (6G)	7G	ISO2 (6H)	ISO2 (6H)	
M	Ød ₁	P	l ₁	l ₂	l ₃	Ød ₂	a		INDEX	C2-111101	C2-116101	C2-113101	C2-111103	C2-111104	C2-211101	C2-111111	
M 1,4	0,3	40	7			2,5	2,1	1,1	0014*	●	○	○					
M 1,6	0,35	40	8			2,5	2,1	1,25	0016	●	○	○					
M 1,7	0,35	40	8			2,5	2,1	1,3	0017	●	○	○					
M 1,8	0,35	40	8			2,5	2,1	1,45	0018	●	○	○					
M 2	0,4	45	8	12		2,8	2,1	1,6	0020	●	○	●					
M 2,5	0,45	50	9	14		2,8	2,1	2,05	0025	●	○	●					
M 2,6	0,45	50	9	14		2,8	2,1	2,1	0026	○	○	○					
M 3	0,5	56	10	18		3,5	2,7	2,5	0030	●	●	●	●	○	●	●	
M 3,5	0,6	56	12	20	4	3	2,9		0035	●	○	○					
M 4	0,7	63	12	21	4,5	3,4	3,3		0040	●	●	●	●	○	●	●	
M 4,5	0,75	70	14	25	6	4,9	3,8		0045	●	○	○					
M 5	0,8	70	14	25	6	4,9	4,2		0050	●	●	●	●	○	●	●	
M 6	1	80	18	30	6	4,9	5		0060	●	●	●	●	○	●	●	
M 7	1	80	18	30	7	5,5	6		0070	●	○	○					
M 8	1,25	90	20	35	8	6,2	6,8		0080	●	●	●	●	○	●	●	
M 9	1,25	90	20	35	9	7	7,8		0090	○	○	○					
M 10	1,5	100	20	39	10	8	8,5		0100	●	●	●	●	○	●	●	

Możliwe wykonanie w tolerancji gwintu 6H+0,1

 Tolerance 6H +0,1 on request
 In Toleranz 6H +0,1 - auf Anfrage

*** Wymiary M1÷M1,4 posiadają tolerancję gwintu ISO1 (4H)**

 * Dimensions M1÷ M1,4 have a tolerance ISO1 (4H)
 * Abmessungen M1÷M1,4 haben Toleranz ISO1(4H)

Przykład zamawiania / Example of order / Beispiel einer Bestellung:

 C2-116101-0060
 DIN-371 B M6 ISO2 HSSE 800 OX

● Dostępne z magazynu, cena w cenniku

Available from stock, the price in the price list / Ab Lager lieferbar, der Preis in der Preisliste

○ Do szybkiej dostawy, cena na zapytanie

For quick delivery, price on request / Für die schnelle Lieferung, Preis auf Anfrage