



Gwint metryczny zwykły ISO DIN-13

ISO Metric coarse thread DIN-13


Metrisches ISO-Regelgewinde DIN-13



HSS

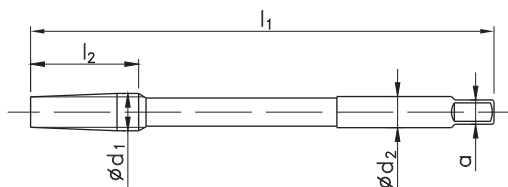

NGMf

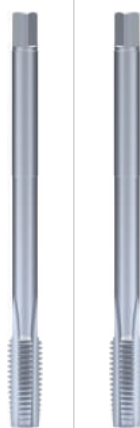

LH

Materiał obrabiany / Material / Werkstoff

P1.2-P1.3

P1.2-P1.3

Rodzaj materiału / Quality of material / Qualität

HSS

HSS

Typ otworu / Hole type / Lochform



<math><1,5d</math>



<math><1,5d</math>

Wykonanie / Execution / Ausführung

LH

Nakrój / Chamfer / Anschnitt


~12P

~12P

Tolerancja / Tolerance / Toleranz

ISO2 (6H)

ISO2 (6H)

M $\varnothing d_1$	P	l_1	l_2	$\varnothing d_2$	a		INDEX	F1-151001	F1-251001
M 4	0,7	90	14	2,8	2,24	3,3	0040	●	●
M 4,5	0,75	100	16	3,15	2,5	3,8	0045	○	○
M 5	0,8	110	16	3,5	2,8	4,2	0050	●	●
M 6	1	120	20	4,5	3,55	5	0060	●	●
M 7	1	120	20	5,6	4,5	6	0070	●	○
M 8	1,25	140	25	6,3	5	6,8	0080	●	●
M 10	1,5	160	30	8	6,3	8,5	0100	●	●
M 12	1,75	180	36	9	7,1	10,2	0120	●	●
M 14	2	180	40	10	8	12	0140	●	○
M 16	2	200	40	12,5	10	14	0160	●	●
M 18	2,5	200	50	14	11,2	15,5	0180	●	○
M 20	2,5	220	50	16	12,5	17,5	0200	●	●
M 22	2,5	220	50	18	14	19,5	0220	●	○
M 24	3	250	60	18	14	21	0240	●	●
M 27	3	250	60	20	16	24	0270	●	○
M 30	3,5	280	70	22,4	18	26,5	0300	●	●
M 33	3,5	280	70	25	20	29,5	0330	●	○
M 36	4	320	80	28	22,4	32	0360	●	●
M 39	4	320	80	31,5	25	35	0390	○	○
M 42	4,5	360	90	31,5	25	37,5	0420	○	○
M 45	4,5	360	90	35,5	28	40,5	0450	○	○
M 48	5	400	100	35,5	28	43	0480	○	○
M 52	5	400	100	40	31,5	47	0520	○	○

Przykład zamawiania / Example of order / Beispiel einer Bestellung:

F1-251001-0040
NGMf M4 LH ISO2 HSS

● Dostępne z magazynu, cena w cenniku

Available from stock, the price in the price list / Ab Lager lieferbar, der Preis in der Preisliste

○ Do szybkiej dostawy, cena na zapytanie

For quick delivery, price on request / Für die schnelle Lieferung, Preis auf Anfrage