INFO
TYPHOON TA-HTA-4HTA
TYPHOON PU-HPU
TYPHOON SUH
TYPHOON ALH
TYPHOON HRC
TYPHOON SUH MINI
TYPHOON HL
C-SD-TA
LFTA
SUTA
HSS-HSS/CO DRILLS
G2
MDTA
HF VH/UP
MEF
ALU
MEX
UH
HSS/CO-HSSP END MILLS
CARBIDE BURRS

UH250

cylindrical shank, 2 flutes ball nose, long reach and reduced neck

OSAWA NORM | UH | NMG UH RED | <70 HRC | 30° | BALL NOSE | Z2 BALL

P	M	K	N	S	H
☆		☆			★

★ 1st choice ☆ suitable

COPYING

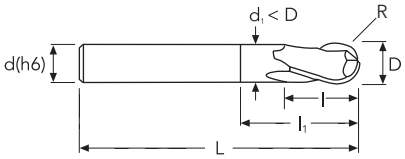

D	D Tol.	R	R Tol.	d(h6)	l	l1	d1	L	z	EDP No.	Stock
1	0/-0.012	0.50	+/-0.005	4	1	2.2	0.95	50	2	UH250010	●
1.5	0/-0.012	0.75	+/-0.005	4	1.5	3	1.45	50	2	UH250015	●
2	0/-0.012	1.00	+/-0.005	6	2	4	1.95	50	2	UH250020	●
2.5	0/-0.012	1.25	+/-0.005	6	4	10	2.40	50	2	UH250025	●
3	0/-0.012	1.50	+/-0.005	6	3	6	2.85	60	2	UH250030	●
4	0/-0.012	2.00	+/-0.005	6	4	8	3.85	70	2	UH250040	●
5	0/-0.012	2.50	+/-0.005	6	5	10	4.85	80	2	UH250050	●
6	0/-0.012	3.00	+/-0.010	6	6	12	5.85	90	2	UH250060	●
8	0/-0.015	4.00	+/-0.010	8	8	16	7.70	100	2	UH250080	●
10	0/-0.015	5.00	+/-0.010	10	10	20	9.70	100	2	UH250100	●
12	0/-0.015	6.00	+/-0.010	12	12	24	11.70	110	2	UH250120	●
14	0/-0.030	7.00	0/-0.020	14	32	80	13.00	125	2	UH250140	●
16	0/-0.030	8.00	0/-0.020	16	32	80	15.00	125	2	UH250160	●
18	0/-0.030	9.00	0/-0.020	18	38	80	17.00	125	2	UH250180	●
20	0/-0.030	10.00	0/-0.020	20	38	80	19.00	125	2	UH250200	●

● stock standard ○ non-standard stock ∇ stock exhaustion